



Mercedes-Benz

## INSTALLATION INSTRUCTIONS


Accessory  
**BACK SEAT  
PROTECTOR / COVER**

Application  
**G CLASS MODELS**



### PARTS LIST

- 1) Cover

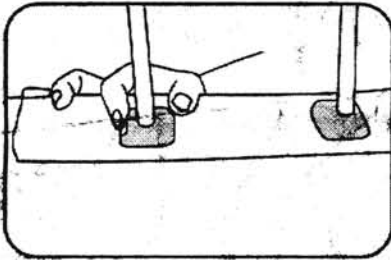

### INSTALLATION INSTRUCTIONS

- 1) Remove all three (3) headrests from the top of the rear seat according to your Owner's manual.



- 2) Place the seat cover over the top of the seat and the seat back section of the seat. Align cut-outs




- 3) Replace the headrest by aligning the holes in the seat with the "button hole" openings for the headrest support rods sewn into the top seam on the cover.




- 4) Push the foam pillow inserts, attached to the underside of the cover, completely through the seat crevice.


(over)

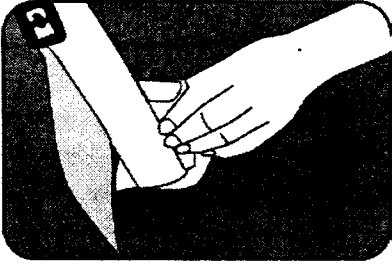

5) Line up the seat belt openings and pull the seat belts through the cover.

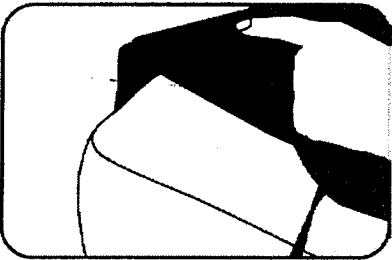

6) Adjust the front and sides of the cover over the bottom section of the seat.

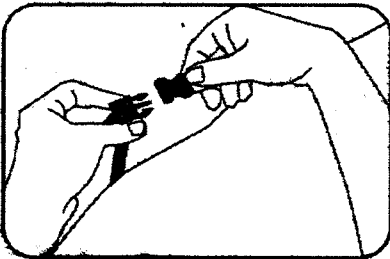

7) Connect the webbing strap buckle assemblies together under the corners of the seat bottom on each side. Make sure the side release buckles are snapped together. Adjust the cover and straps.

#### **CLEANING INSTRUCTIONS**

Cover must be hand washed using cold or warm water.

Use 1/2 cup of liquid FANTASTIK® ALL PURPOSE CLEANER only (not soap or detergents). DO NOT use bleach.

Rinse cover thoroughly - it is most important that all the cleaner be removed. Hang the cover and allow it to drip dry.

**WARNING:** *Do not fold or store a wet cover for more than a couple of days.*