


**MODELS 463.232 /233 /240 /241 /330 /331**  
**single-wing rear-end door with window**

- 1 Battery cover
- 2 Rubber grommet
- 3 Left rear pillar panel
- 4 Center high-mounted stop lamp

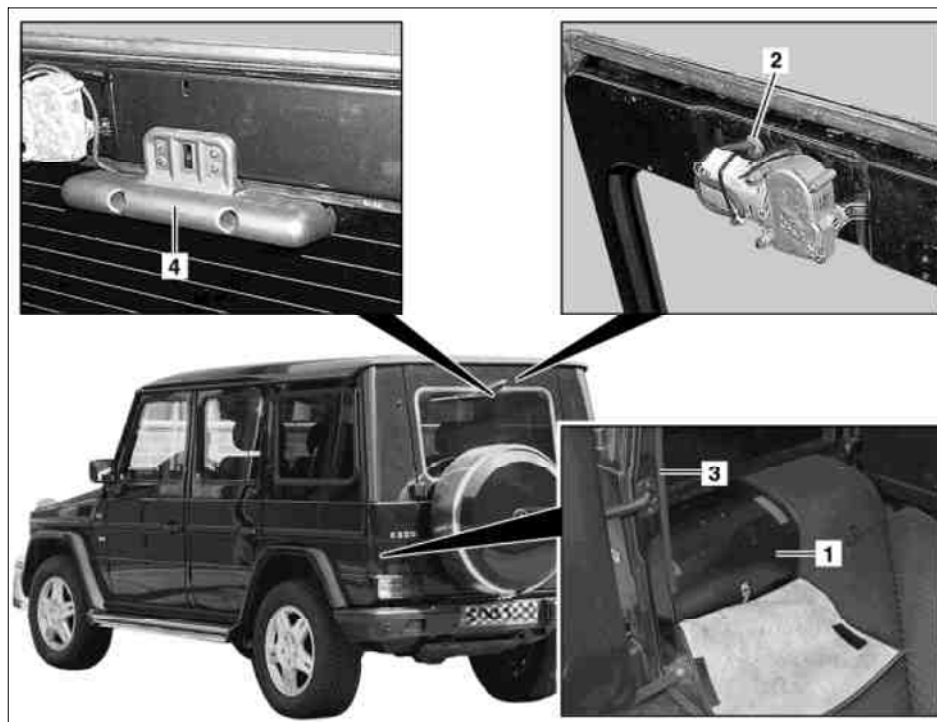

P82.10-2587-06

	<b>Remove</b>		
1 AR	Remove door liner on rear door		AR72.20-P-6615G
2	Remove left rear pillar panel (3)		
3	Remove battery cover (1)		
4	Pull out grommet (2)		
	<b>Install</b>		
5	Retrofit wiring harness for center high-mounted stop lamp		AN82.10-P-0004-01GV
6	Retrofit stop lamp		AN82.10-P-0004-02GV
7	Perform a function test		
8	Insert grommet (2)		
9	Install battery cover (1)		
10	Install left rear pillar panel (3)		
11	Install trim panel of rear door		
AR			AR72.20-P-6615G

**Parts ordering notes**

Part no.	Designation	Quantity
A 463 820 05 56	Stop lamp assembly	1
A 463 825 03 09	Housing	1
N 007 985 004 515	Bolt M4	4
N 009 021 004 206	Washer	4
A 463 987 02 72	Edge guard	1
N 914 127 006 206	Sheet metal screw	2
A 463 545 02 28	Plug housing	1
A 005 545 85 26	Contact spring	2
A 116 991 00 40	Spacer sleeve	4

N 913 024 004 100	Blind rivet nut M4	4
commercially available	Cable lug (A5-1/DIN 46225)	1
commercially available	0.5 mm line (br) 2	3000 mm
commercially available	0.5 mm line (sw/rt) 2	3000 mm
commercially available	Insulating hose	3000 mm